


REVISIONS		REVISED DATE	APPR
SYM	DESCRIPTION		

PART NO.	LENGTH "A"±.005	DRILL DEPTH "B"	STANDOFF	
			TAP DEPTH DIM	TAP DEPTH "C" NO. THDS
8000C	.250	.218	.133	5-6
8000E	.375	.312	.250	10-11
8000G	.500	.375	.250	10-11
8000J	.625	.375	.250	10-11
8000L	.750	.375	.250	10-11
8000N	.875	.375	.250	10-11
8000Q	1.000	.375	.250	10-11
8000R	1.125	.375	.250	10-11
8000S	1.250	.375	.250	10-11
8000T	1.375	.375	.250	10-11
8000U	1.500	.375	.250	10-11
8000V	1.625	.375	.250	10-11
8000W	1.750	.375	.250	10-11
8000Y	2.000	.375	.250	10-11
8000ZB	2.500	.375	.250	10-11
8000ZD	3.000	.375	.250	10-11

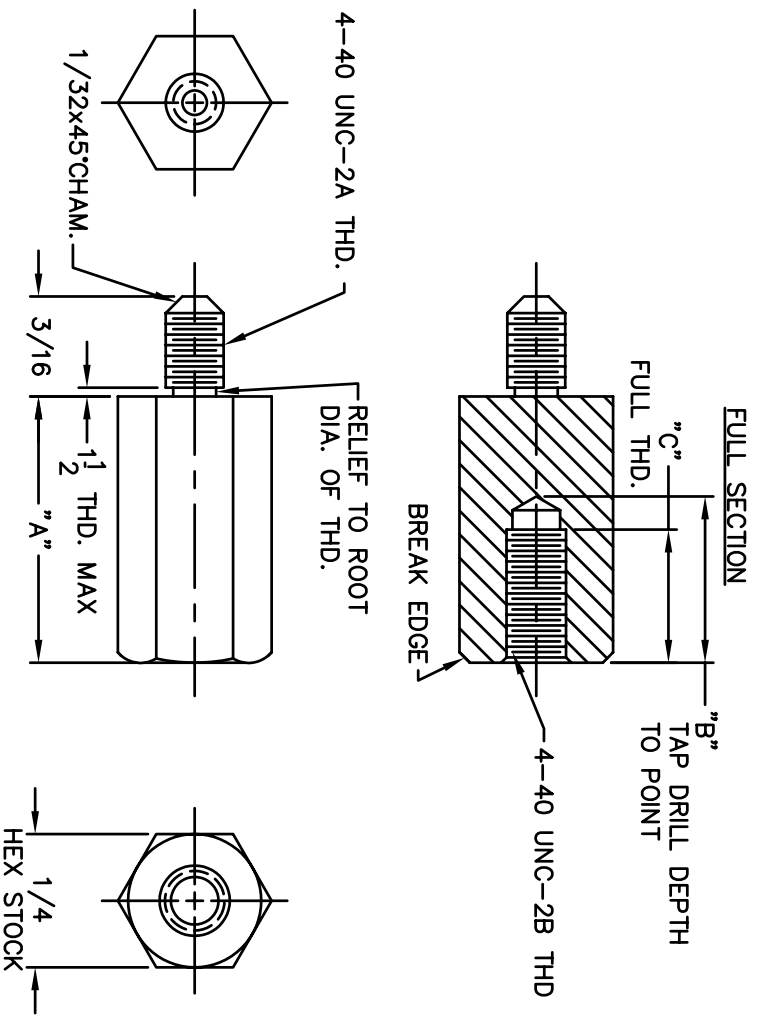

MATERIAL: ALUMINUM ALLOY 2011 T-3		FINISH: CODE 41, CLEAR CHROMATE	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE: 8000C-8000ZD	
XX	XXX	ALUMINUM HEX MALE/FEMALE STANDOFF	
FRAGMENTS	ANGLES	DRAWN: C.MCBRIDE DATE: 09-14-00	
---	---	CHECKED: DATE: . . .	
HEAT TREAT: ---	SCALE: 4X	APPROVED: DATE: . . .	
PLOT SCALE: 1=1		SIZE: B	DRAWING NUMBER: 8000C-8000ZD
			ISSUE: E

ABBATRON
Electronic Connectors and Hardware
632 Arch Street, Meadville, Pa. 16335