



BILL OF MATERIALS				
DET.	QTY.	DESCRIPTION	MATERIAL	PLATING
1	1	BODY	BRASS	GOLD
2	1	CONTACT	BeCu	GOLD
3	1	INSULATOR	PTFE	-
4	1	FERRULE	BRASS	GOLD
5	1	BRAID HOLDER	BRASS	GOLD
6	1	C-RING	BeCu	GOLD

REVISIONS			
SYM	DESCRIPTION	REVISED	DATE / APPR

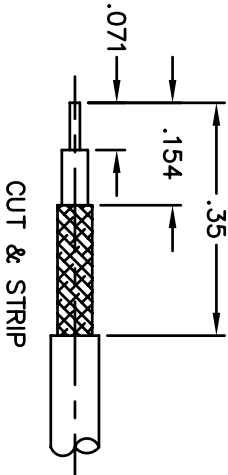

CUT & STRIP

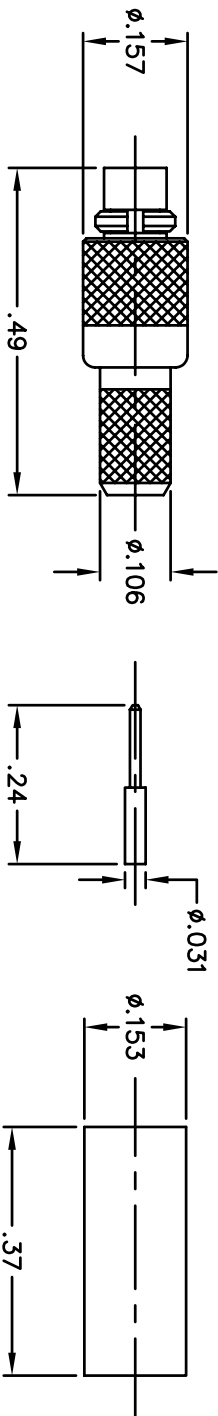

KEY PERFORMANCE

- 1) IMPEDANCE: 50 ohm
- 2) FREQUENCY: 0-6GHz
- 3) CONTACT RESISTANCE:
CENTER CONDUCTOR: 5.0 MILLIOHMS MAX
OUTER CONDUCTOR: 2.5 MILLIOHMS MAX
- 4) INSULATION RESISTANCE: 1000 MEGOHMS MIN
- 5) VOLTAGE WITHSTANDING: 500V MIN
- 6) VSWR 1.3 MAX

MATERIAL: SEE BOM		FINISH: SEE BOM	HEAT TREAT: ---
DIMENSIONAL TOLERANCES		TITLE: MMCX5113	
UNLESS OTHERWISE SPECIFIED		MMCX PLUG, CRIMP	
.XX		.XXX	
---		---	
FRACTIONS		SCALE	
---		5:1	
SURFACE FINISH		DRAWN: T. LORD DATE: 8/27/07	
125		CHECKED: T. LORD DATE: 8/27/07	
.002		APPROVED: T. LORD DATE: 8/27/07	
B		SIZE	
SD: MMCX5113		DRAWING NUMBER	
-		ISSUE	

THIS DRAWING AND THE INFORMATION THEREIN IS THE PROPERTY OF ABBATRON, LLC AND IS UNAUTHORIZED FOR REPRODUCTION THEREOF IS PROHIBITED.

ABBATRON
Electronic Connectors and Hardware
632 Arch Street, Meadville, Pa. 16335