
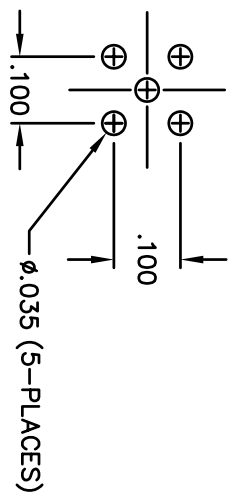



BILL OF MATERIALS				
DET.	QTY.	DESCRIPTION	MATERIAL	PLATING
1	1	BODY	BRASS	GOLD
2	1	CONTACT	BeCu	GOLD
3	1	INSULATOR	PTFE	-

REVISIONS		
SYM	DESCRIPTION	REVISED DATE / APPR

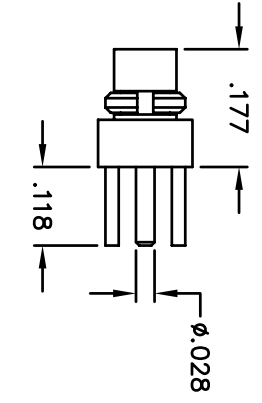

KEY PERFORMANCE

- 1) IMPEDANCE: 50 ohm
- 2) FREQUENCY: 0-6GHz
- 3) CONTACT RESISTANCE:
CENTER CONDUCTOR: 5.0 MEGOHMS MAX
OUTER CONDUCTOR: 2.5 MEGOHMS MAX
- 4) INSULATION RESISTANCE: 1000 MEGOHMS MIN
- 5) VOLTAGE WITHSTANDING: 500V MIN
- 6) VSWR 1.3 MAX

MATERIAL: SEE BOM		FINISH: SEE BOM		HEAT TREAT: ---	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE: MMCX5127			
XX	XXX	MMCX PLUG			
---	---	PCB MOUNT			
FRACTIONS	ANGLES	SCALE			
---	---	5:1			
SURFACE FINISH: 129		DRAWN: T. LORD		DATE: 8/27/07	
.002		CHECKED: T. LORD		DATE: 8/27/07	
APPROVED: T. LORD		DATE: 8/27/07		SIZE: B	
<p style="text-align: center;">ABBATRON</p> <p style="text-align: center;">Electronic Connectors and Hardware 632 Arch Street, Meadville, Pa. 16335</p>			DRAWING NUMBER		ISSUE
			SD: MMCX5127		-

THIS DRAWING AND THE INFORMATION THEREIN IS THE PROPERTY OF ABBATRON, LLC AND IS UNAUTHORIZED FOR REPRODUCTION THEREOF IS PROHIBITED.