
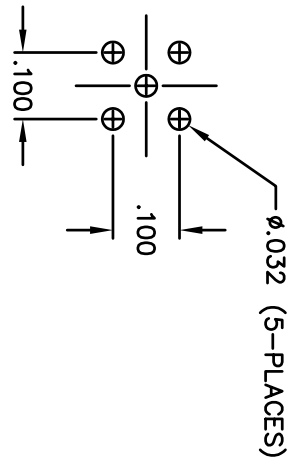


DET.	QTY.	DESCRIPTION	MATERIAL	PLATING
1	1	BODY	BRASS	GOLD
2	1	CONTACT	BeCu	GOLD
3	1	INSULATOR	PTFE	-

BILL OF MATERIALS		REVISIONS	
SYM	DESCRIPTION	REVISED DATE	APPR

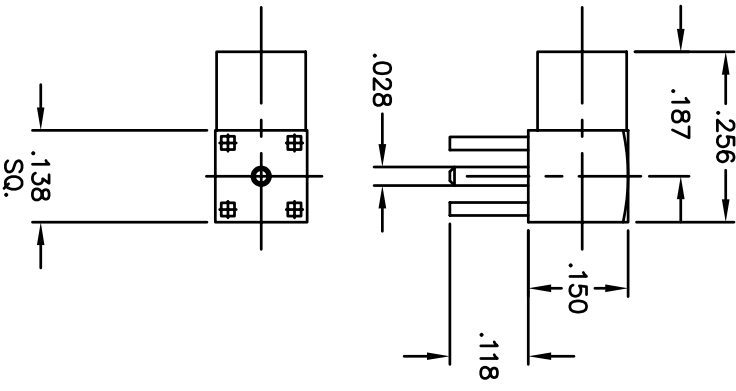

- KEY PERFORMANCE
- 1) IMPEDANCE: 50 ohm
  - 2) FREQUENCY: 0-6GHz
  - 3) CONTACT RESISTANCE: CENTER CONDUCTOR: 5.0 MILLIOHMS MAX  
OUTER CONDUCTOR: 2.5 MILLIOHMS MAX
  - 4) INSULATION RESISTANCE: 1000 MEGOHMS MIN
  - 5) VOLTAGE WITHSTANDING: 500V MIN
  - 6) VSWR 1.5 MAX

MATERIAL: SEE BOM		FINISH: SEE BOM		HEAT TREAT: ---	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE: MMCX5247		Electronic Connectors and Hardware	
.XX	.XXX	.XXX	MMCX JACK	632 Arch Street, Meadville, Pa. 16335	
---	---	---	PCB MOUNT		
FRACTIONS	ANGLES	SCALE	DRAWN: T. LORD	DATE: 8/27/07	SIZE: B
---	---	5:1	CHECKED: T. LORD	DATE: 8/27/07	DRAWING NUMBER: MMCX5247
SURFACE FINISH: 125		.002	APPROVED: T. LORD	DATE: 8/27/07	ISSUE: -

THIS DRAWING AND THE INFORMATION THEREIN IS THE PROPERTY OF ABBATRON, LLC AND IS UNCLASSIFIED. REPRODUCTION OF THIS DRAWING OR INFORMATION THEREOF IS PROHIBITED.

**ABBATRON**